


PUMP DISCHARGE BAG (SESC-26)

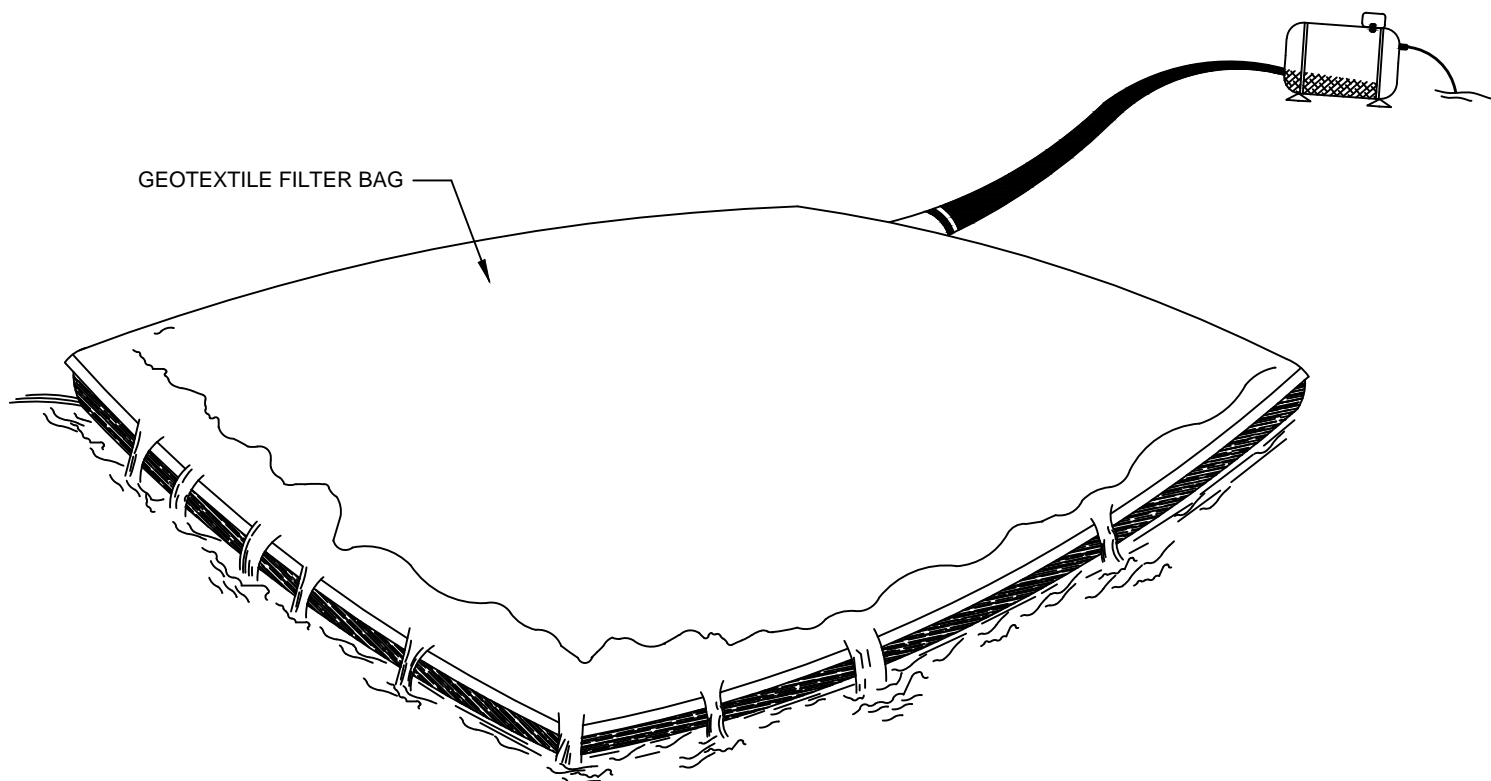

GENERAL NOTES

1. MAKE SURE THAT THE FILTER BAG IS PROPERLY SIZED FOR THE DISCHARGE. BAG SIZE SHOULD BE BASED ON VOLUME OF WATER BEING PUMPED AND SURFACE AREA PROVIDED.

2. UNFOLD BAG, PLACE LIFTING STRAPS UNDER THE BAG.

3. INSTALL FILTER BAG AT A STABLE LOCATION, YOU MAY PLACE IT OVER DENSE VEGETATION OR GRAVEL.

4. TAKE CARE WHEN DEWATERING CONSTRUCTION SITES. DO NOT PUMP SEDIMENT-LADEN WATER DIRECTLY TO LAKES, STREAMS, COUNTY DRAINS, STORM DRAINS, WETLANDS OR OTHER ENVIRONMENTALLY SENSITIVE AREAS. THE PROPER WAY TO DEWATER A CONSTRUCTION SITE IS AS FOLLOWS:

- PLACE A GEOTEXTILE FILTER BAG OR FILTER SOCK ON THE END OF THE DISCHARGE HOSE.
- DISCHARGE DIRECTLY TO A SEDIMENT BASIN.
- DISCHARGE TO A WELL VEGETATED AREA (NOT WETLANDS).
- DISCHARGE INTO A CONSTRUCTED CONTAINMENT AREA.
- DISCHARGE AWAY FROM CONSTRUCTION ACTIVITIES.

DISSIPATED ENERGY TO PREVENT SCOURING, AND INSPECT DEWATERING OPERATIONS SEVERAL TIMES DAILY.

5. INSERT HOSE INTO FILTER BAG, USE HOSE TO BAG CONNECTION IS SECURE AND THAT THERE ARE NO TEARS IN THE BAG. MAKE SURE THAT CLEAN WATER IS FLOWING OUT OF THE BAG.

6. REPLACE THE FILTER BAG WHEN $\frac{1}{2}$ FULL OF SEDIMENT, IF THE BAG APPEARS DAMAGED, OR THE BAG FAILS TO DISCHARGE AT A PRACTICAL RATE.

7. PROPERLY DISPOSE OF BAGS, BAGS CANNOT BE REUSED.

8. THESE ARE GENERAL GUIDELINES. PLEASE SEE THE MANUFACTURER'S SPECIFICATIONS FOR DETAILED INSTALLATION AND MAINTENANCE REQUIREMENTS.